

PUMP SPECIFICATIONS

Flow (Max)	175 l/s
Head (Max)	115m
Nominal Duty	120 l/s @ 80 mtrs
Pump Model	RA-I-150x125-315 (342)
Pump Speed	2200 rpm
Pump Inlet/outlet	150mm (6") x 125mm (5")
Pipework Size	150mm (6") x 150mm (6")
Solids Handling	Clear Liquid

RECOMMENDED ENGINES

Make	Model
Perkins	1106D-E70TA
Caterpillar	C7.1 151
Cummins	QSB 6.7T3
Volvo Penta	TAD541VE

SKID SPECS AND DIMENSIONS*

Skid Base Model	M900 (Mining Series)
Fuel Tank Capacity	900 Litres
Overall Dimensions (mm)	L3200 x W1315 x H2370

MINING PACKAGE INCLUSIONS


- Heavy duty baffled fuel tank skid base
- 2 or 4 Post Lifting Frame & Roof design options
- Forklift accessible pockets
- Shun/Bull bar and skid wear plates
- Suction and discharge pipework
- Auto self-priming System (Vacuum Diaphragm)
- Engine control & protection system
- External emergency stop button
- Lockable fuel cap
- Check valve & isolation valve (discharge piping)
- Lockable steel battery enclosure
- Fire extinguisher
- Amber strobe light

OPTIONAL EXTRAS

- Remote start / stop
- Telemetry systems
- Battery isolator
- Additional external emergency stops (both sides)
- Solar panel and trickle charger
- LED work lights / flashing lights
- Wiggins style quick fill system
- Flowmeter




OTHER CONFIGURATIONS

- Trailer mounted (open)
- Trailer mounted canopy
- Sound attenuated (Acoustic Canopy)
- Pontoon mounted
- Custom design options available

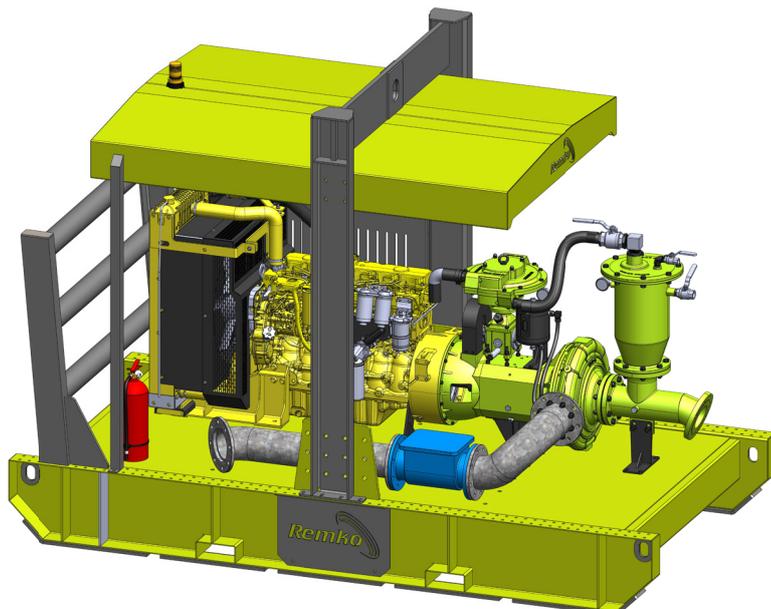

BUILT TO BE TOUGH

Variable speed - faster speeds:

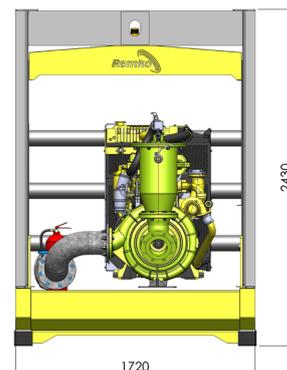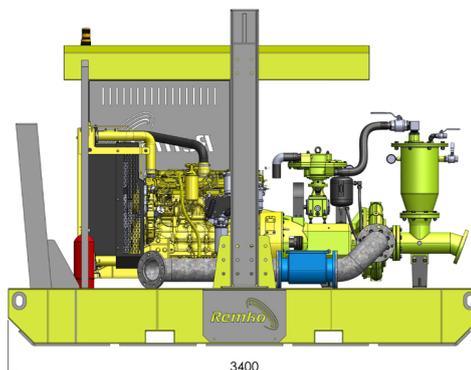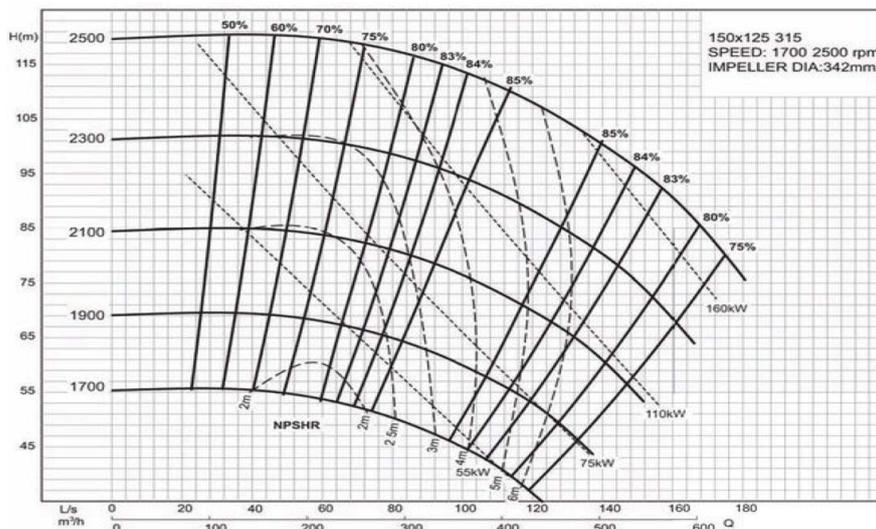

** Pumpset & pipework drawing shown above are for indicative purpose only. Contact Remko for dimensional as-built drawings & dimensions.

* Guide only. Technical specifications may vary with the pumpset configuration and details subject to change without notice.