

PUMP SPECIFICATIONS

Flow (Max)	210 l/s
Head (Max)	150m
Nominal Duty	150 l/s @ 130 mtrs
Pump Model	RA-I-200x150-500A (547)
Pump Speed	1800 rpm
Pump Inlet/outlet	200mm (8") x 150mm (6")
Pipework Size	200mm (8") x 150mm (6")
Solids Handling	Clear Liquid

RECOMMENDED ENGINES

Make	Model
Perkins	1706D-E93TA
Caterpillar	C9.3B 280
Cummins	QSM11T3
Volvo Penta	TAD1141VE

SKID SPECS AND DIMENSIONS*

Skid Base Model	MH1500 (Mining Series)
Fuel Tank Capacity	1500 Litres
Overall Dimensions (mm)	L4000 x W1920 x H2750

MINING PACKAGE INCLUSIONS


- Heavy duty baffled fuel tank skid base
- 2-Post Lifting frame & roof
- Shun/Bull bar and skid wear plates
- Suction and discharge pipework
- Auto self-priming System (Vacuum Diaphragm)
- Engine control & protection system
- External emergency stop button
- Lockable fuel cap
- Check valve & isolation valve (discharge piping)
- Lockable steel battery enclosure
- Fire extinguisher
- Amber strobe light

OPTIONAL EXTRAS

- Remote start / stop
- Telemetry systems
- Battery isolator
- Additional external emergency stops (both sides)
- Solar panel and trickle charger
- LED work lights / flashing lights
- Wiggins style quick fill system
- Flowmeter




OTHER CONFIGURATIONS

- Trailer mounted (open)
- Trailer mounted canopy
- Sound attenuated (Acoustic Canopy)
- Pontoon mounted
- Custom design options available

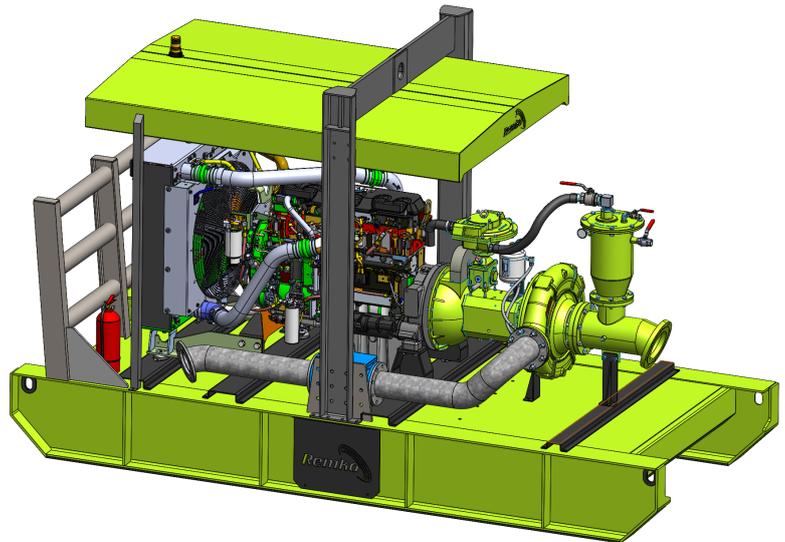

BUILT TO BE TOUGH

Variable speed:

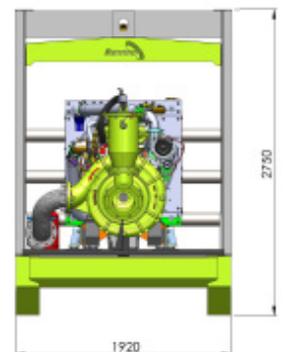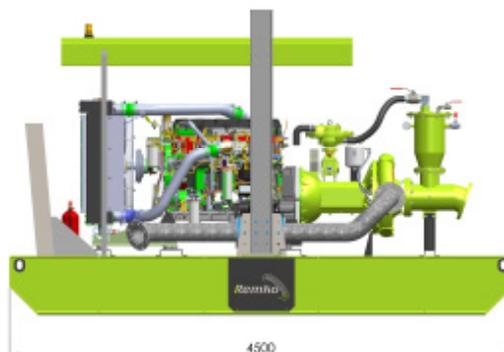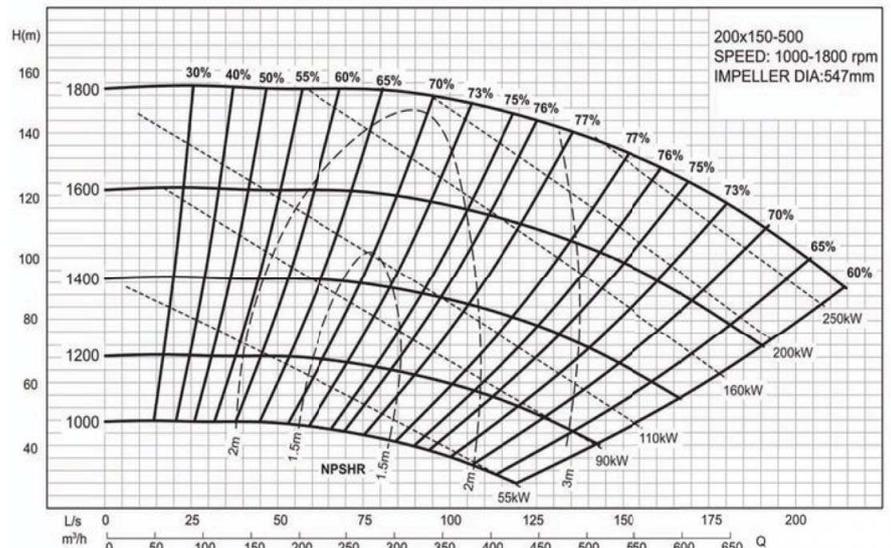

** Pumpset & pipework drawing shown above are for indicative purpose only. Contact Remko for dimensional as-built drawings & dimensions.

* Guide only. Technical specifications may vary with the pumpset configuration and details subject to change without notice.

Remko