

PUMP SPECIFICATIONS

Flow (Max)	390 l/s
Head (Max)	62m
Nominal Duty	300 l/s @ 40 mtrs
Pump Model	RA-LP-300x300-359
Pump Speed	1800 rpm
Pump Inlet/outlet	300mm (12") x 300mm (12")
Pipework Size	300mm (12") x 300mm (12")
Solids Handling	75mm (3")

RECOMMENDED ENGINES

Make	Model
Perkins	1106D-E70TA
CAT	C7.1 205
Cummins	6CTA8.3C
Volvo Penta	TAD542VE

SKID SPECS AND DIMENSIONS*

Skid Base Model	M1200 (Mining Series)
Fuel Tank Capacity	1200 Litres
Overall Dimensions (mm)	L3200 x W1720 x H2430

MINING PACKAGE INCLUSIONS


- Heavy duty baffled fuel tank skid base
- 2 or 4 Post Lifting Frame & Roof design options
- Forklift accessible pockets
- Shun/Bull bar and skid wear plates
- Suction and discharge pipework
- Auto self-priming System (Vacuum Diaphragm)
- Engine control & protection system
- External emergency stop button
- Lockable fuel cap
- Check valve & isolation valve (discharge piping)
- Lockable steel battery enclosure
- Fire extinguisher
- Amber strobe light

OPTIONAL EXTRAS





- Remote start / stop
- Telemetry systems
- Battery isolator
- Additional external emergency stops (both sides)
- Solar panel and trickle charger
- LED work lights / flashing lights
- Wiggins style quick fill system
- Flowmeter

OTHER CONFIGURATIONS

- Trailer mounted (open)
- Trailer mounted canopy
- Sound attenuated (Acoustic Canopy)
- Pontoon mounted
- Custom design options available

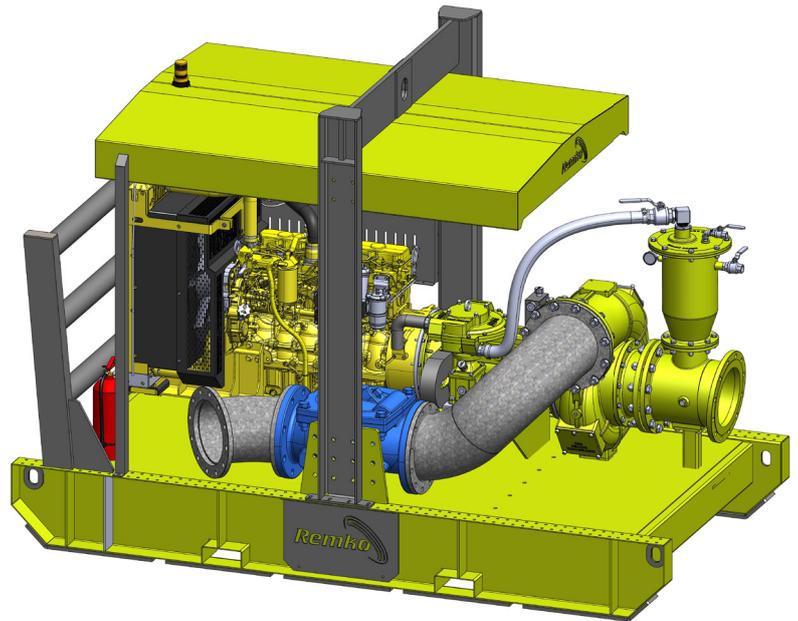

BUILT TO BE TOUGH

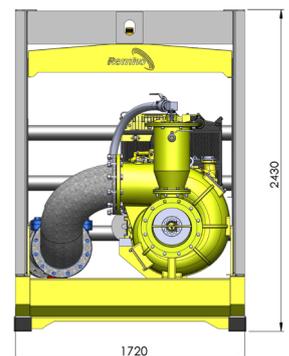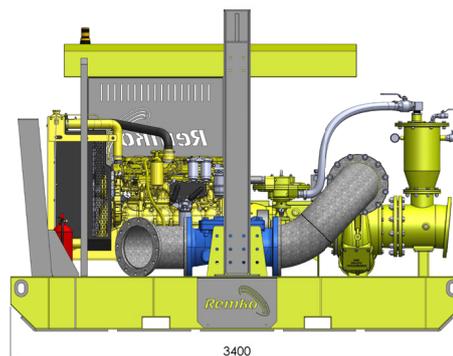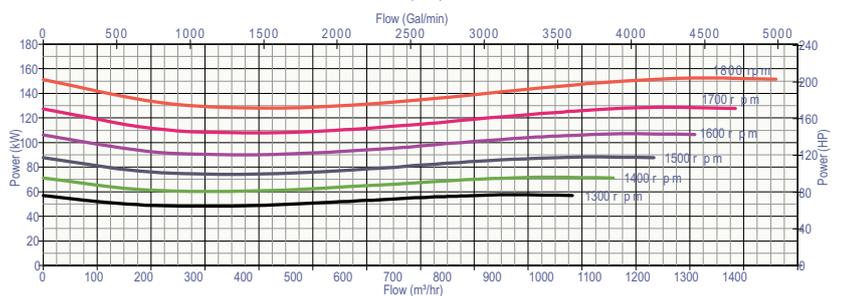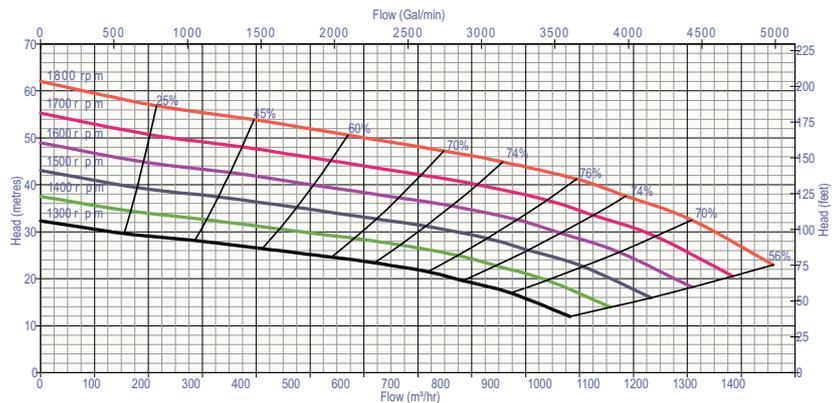

** Pumpset & pipework drawing shown above are for indicative purpose only. Contact Remko for dimensional as-built drawings & dimensions.

* Guide only. Technical specifications may vary with the pumpset configuration and details subject to change without notice.

Remko