

PUMP SPECIFICATIONS

Flow (Max)	440 l/s
Head (Max)	95m
Nominal Duty	400 l/s @ 60 mtrs
Pump Model	RA-I-300x250-500A (465)
Pump Speed	1750 rpm
Pump Inlet/outlet	300mm (12") x 250mm (10")
Pipework Size	300mm (12") x 250mm (10")
Solids Handling	Clear Liquid

RECOMMENDED ENGINES

Make	Model
Perkins	2506D-E15TA
Caterpillar	C15 ACERT
Cummins	QSX15T3
Volvo Penta	TAD1343VE

SKID SPECS AND DIMENSIONS*

Skid Base Model	MH2000 (Mining Series)
Fuel Tank Capacity	2000 Litres
Overall Dimensions (mm)	L5500 x W1920 x H3050

MINING PACKAGE INCLUSIONS


- Heavy duty baffled fuel tank skid base
- 2-Post Lifting frame & roof
- Shun/Bull bar and skid wear plates
- Suction and discharge pipework
- Auto self-priming System (Vacuum Diaphragm)
- Engine control & protection system
- External emergency stop button
- Lockable fuel cap
- Check valve & isolation valve (discharge piping)
- Lockable steel battery enclosure
- Fire extinguisher
- Amber strobe light

OPTIONAL EXTRAS

- Remote start / stop
- Telemetry systems
- Battery isolator
- Additional external emergency stops (both sides)
- Solar panel and trickle charger
- LED work lights / flashing lights
- Wiggins style quick fill system
- Flowmeter




OTHER CONFIGURATIONS

- Trailer mounted (open)
- Trailer mounted canopy
- Sound attenuated (Acoustic Canopy)
- Pontoon mounted
- Custom design options available

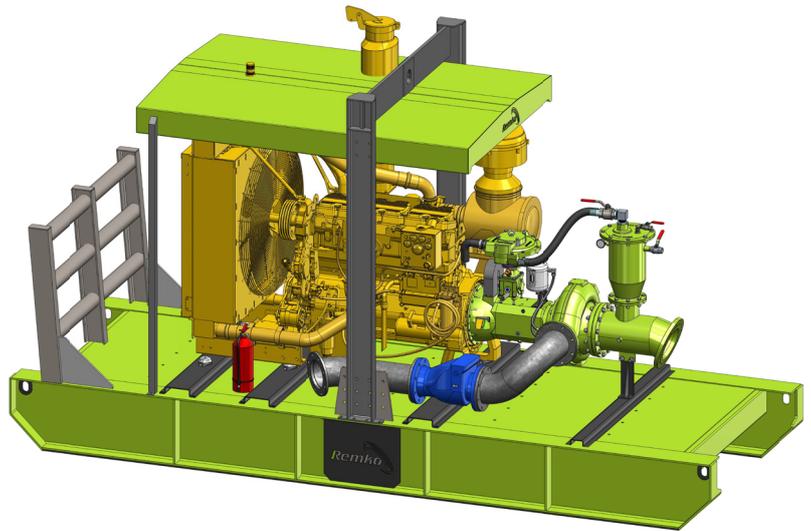

BUILT TO BE TOUGH

1750rpm:

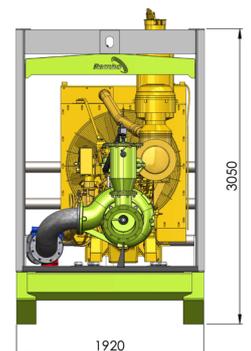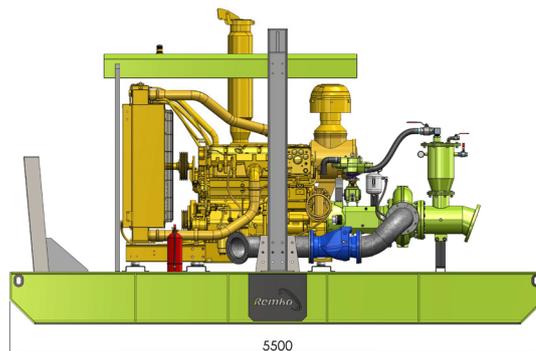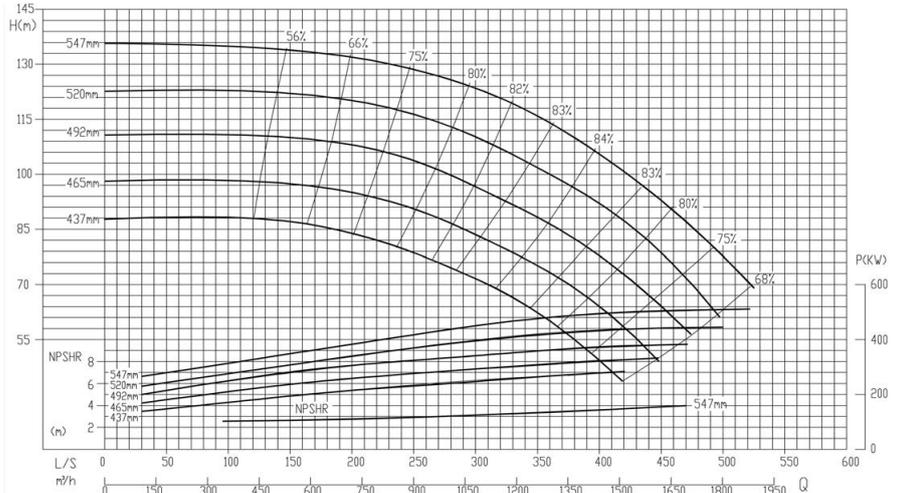

** Pumpset & pipework drawing shown above are for indicative purpose only. Contact Remko for dimensional as-built drawings & dimensions.

* Guide only. Technical specifications may vary with the pumpset configuration and details subject to change without notice.

Remko