

### PUMP SPECIFICATIONS

Flow (Max)	100 l/s
Head (Max)	200m
Nominal Duty	80 l/s @ 160 mtrs
Pump Model	RA-A-HH150C22 (6x4-C22)
Pump Speed	1900 rpm
Pump Inlet/outlet	150mm (6") x 100mm (4")
Pipework Size	150mm (6") x 150mm (6")
Solids Handling	Clear Liquid

### RECOMMENDED ENGINES

Make	Model
Perkins	1706D-E93TA
CAT	C9.3B 250
Volvo Penta	TAD843VE
Cummins	QSL9 T3

### SKID SPECS AND DIMENSIONS\*

Skid Base Model	M1200 (Mining Series)
Fuel Tank Capacity	1200 Litres
Overall Dimensions (mm)	L3400 x W1720 x H2430

### MINING PACKAGE INCLUSIONS


- Heavy duty baffled fuel tank skid base
- 2-Post Lifting frame & roof
- Forklift accessible pockets
- Shun/Bull bar and skid wear plates
- Suction and discharge pipework
- Auto self-priming System (Vacuum Diaphragm)
- Engine control & protection system
- External emergency stop button
- Lockable fuel cap
- Check valve & isolation valve (discharge piping)
- Lockable steel battery enclosure
- Fire extinguisher
- Amber strobe light

### OPTIONAL EXTRAS




- Remote start / stop
- Telemetry systems
- Battery isolator
- Additional external emergency stops (both sides)
- Solar panel and trickle charger
- LED work lights / flashing lights
- Wiggins style quick fill system
- Flowmeter

### OTHER CONFIGURATIONS

- Trailer mounted (open)
- Trailer mounted canopy
- Sound attenuated (Acoustic Canopy)
- Pontoon mounted
- Custom design options available

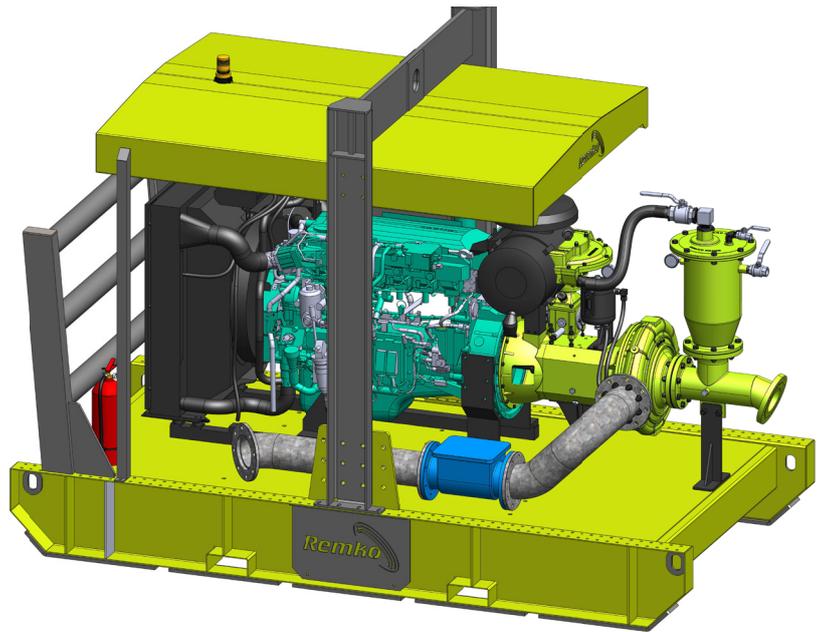

## BUILT TO BE TOUGH

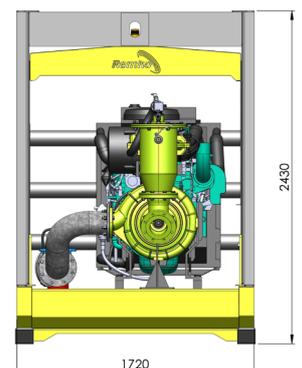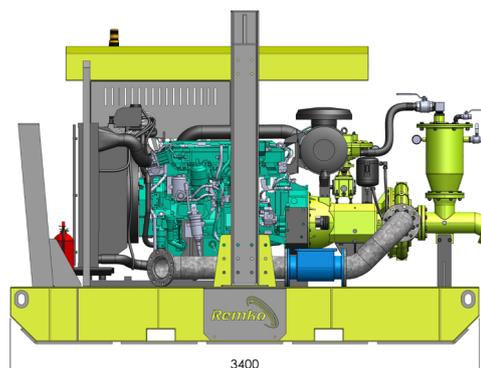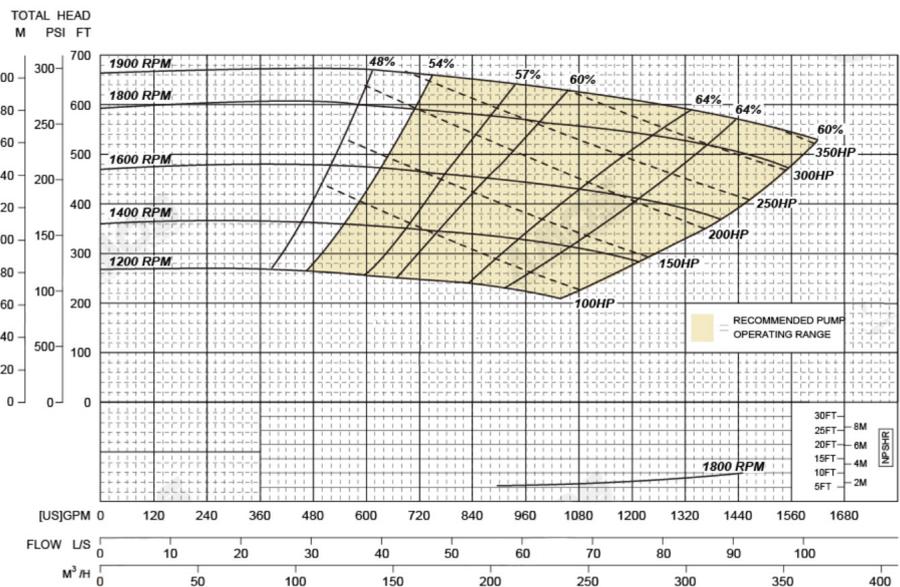

\*\* Pumpset & pipework drawing shown above are for indicative purpose only. Contact Remko for dimensional as-built drawings & dimensions.

\* Guide only. Technical specifications may vary with the pumpset configuration and details subject to change without notice.

Remko