

PUMP SPECIFICATIONS

| | |
|-------------------|-------------------------|
| Flow (Max) | 150 l/s |
| Head (Max) | 85m |
| Nominal Duty | 40 l/s @ 40 mtrs |
| Pump Model | RA-RC 150x125-250 (278) |
| Pump Speed | 1800 rpm |
| Pump Inlet/outlet | 150mm (6") x 125mm (5") |
| Pipework Size | 150mm (6") x 150mm (6") |
| Solids Handling | Clear Liquid |

RECOMMENDED ENGINES

| Make | Model |
|---------|----------|
| Perkins | 1104A-44 |
| CAT | C3054 CT |
| Cummins | QSF 2.8T |

SKID SPECS AND DIMENSIONS*

| | |
|-------------------------|-----------------------------|
| Skid Base Model | M600 (Mining Series) |
| Fuel Tank Capacity | 600 Litres |
| Overall Dimensions (mm) | L2800 x W1145 x H2070 |

MINING PACKAGE INCLUSIONS


- Heavy duty baffled fuel tank skid base
- Lifting frame & roof - Adjustable lifting point
- Forklift accessible pockets
- Shun/Bull bar and skid wear plates
- Suction and discharge pipework
- Auto self-priming System (Vacuum Diaphragm)
- Engine control & protection system
- External emergency stop button
- Lockable fuel cap
- Check valve & isolation valve (discharge piping)
- Lockable steel battery enclosure
- Fire extinguisher
- Amber strobe light

OPTIONAL EXTRAS

- Remote start / stop
- Telemetry systems
- Battery isolator
- Additional external emergency stops (both sides)
- Solar panel and trickle charger
- LED work lights / flashing lights
- Wiggins style quick fill system
- Flowmeter




OTHER CONFIGURATIONS

- Trailer mounted (open)
- Trailer mounted canopy
- Sound attenuated (Acoustic Canopy)
- Pontoon mounted
- Custom design options available

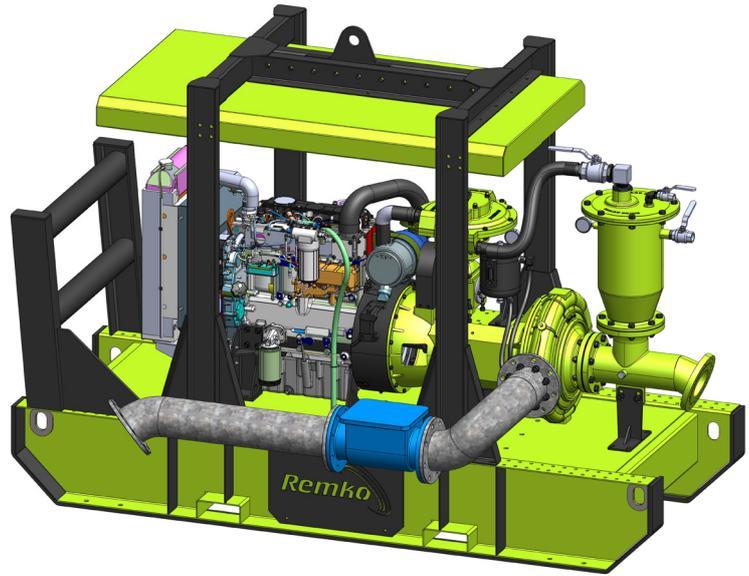

BUILT TO BE TOUGH

SPEED: 2000-2800 R.P.M
IMPELLER DIA: 342mm

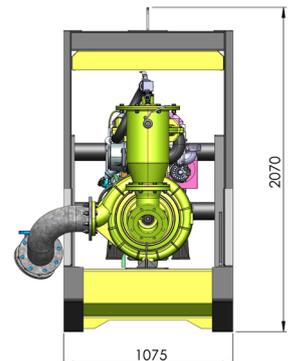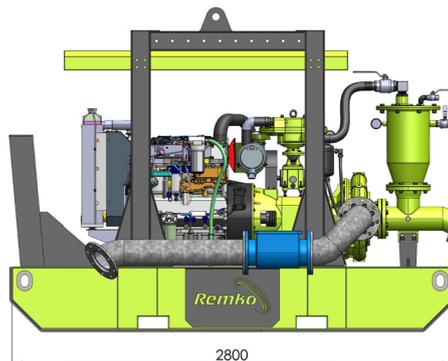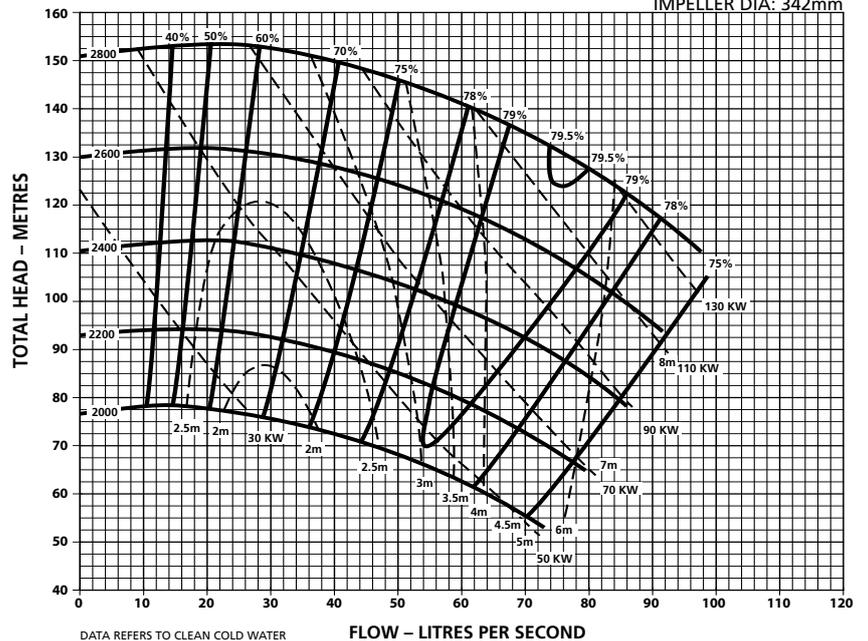

** Pumpset & pipework drawing shown above are for indicative purpose only. Contact Remko for dimensional as-built drawings & dimensions.

* Guide only. Technical specifications may vary with the pumpset configuration and details subject to change without notice.