

REMKO RT250
Heavy Duty Trash Pump

Remko

REMKO RT250

Self priming with dependable performance makes RT Series Pumps a sensible solution for industry and municipalities requiring little maintenance, resulting in significant savings of time and money.

RT Series Pumps are ideally suited for industrial applications including: steel and paper mills, abattoirs, mines, food and chemical processing plants, construction industry, dewatering, trade waste and sewage handling.



P U M P S P E C I F I C A T I O N S

SPECIFICATIONS

Maximum outside dimensions. 1236mm x 785.9mm x 1041.4mm (length x width x height)

Weight. 635 kilograms

Impeller diameter. 375mm

RPM. From 650 to 1450 RPM

Solids. 76 millimetres maximum

SELF PRIMING SPECIFICATIONS

650 RPM - 2.7 metres. 750 RPM - 3.7 metres. 850 RPM - 4.6 metres. 950 RPM - 5.2 metres.


1050 RPM - 6.1 metres. 1150 RPM - 6.4 metres. 1250 RPM - 6.7 metres. 1350 RPM - 7.0 metres.


Confirm NPSH before using Curve.

Note: Specifications may change without notice

P E R F O R M A N C E C U R V E

The Performance Curve indicates Total Metres Head vs Flow Rate

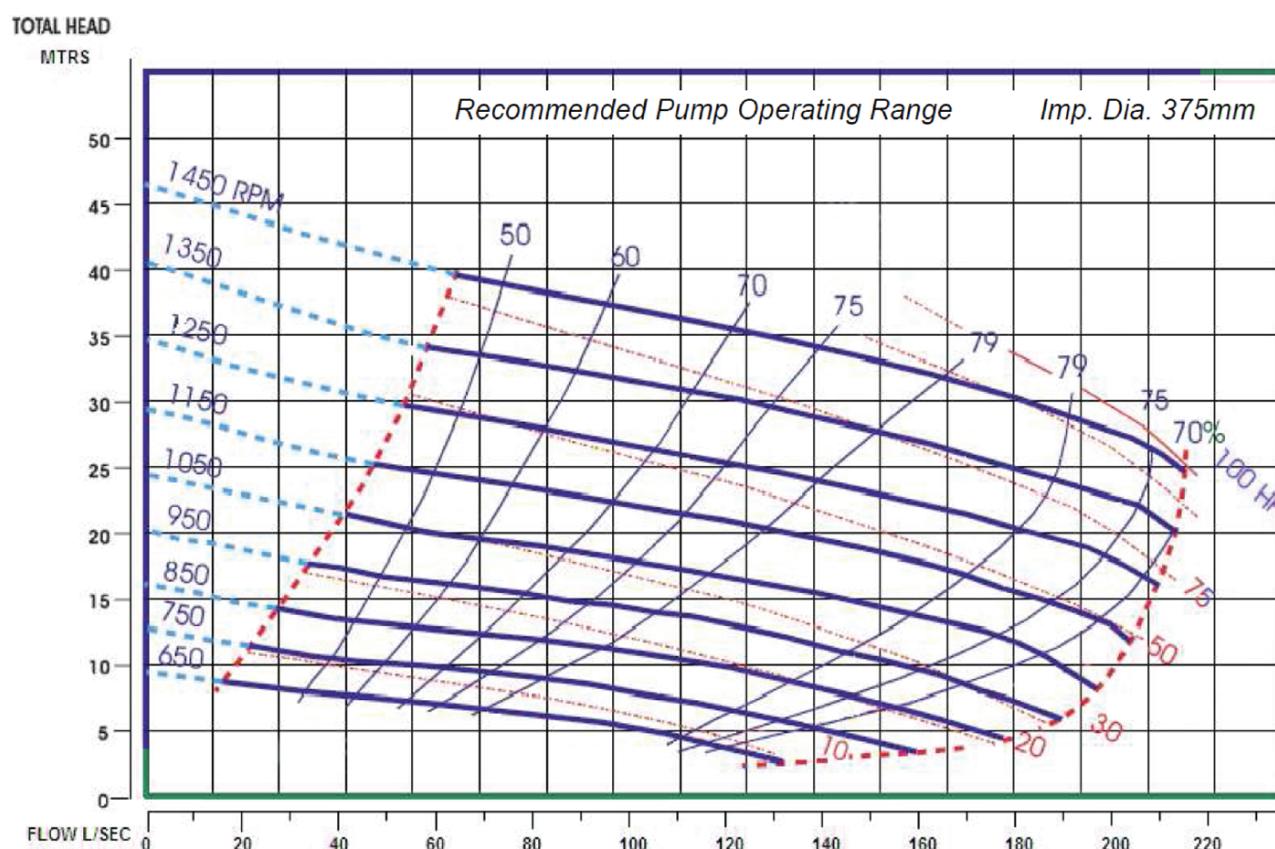

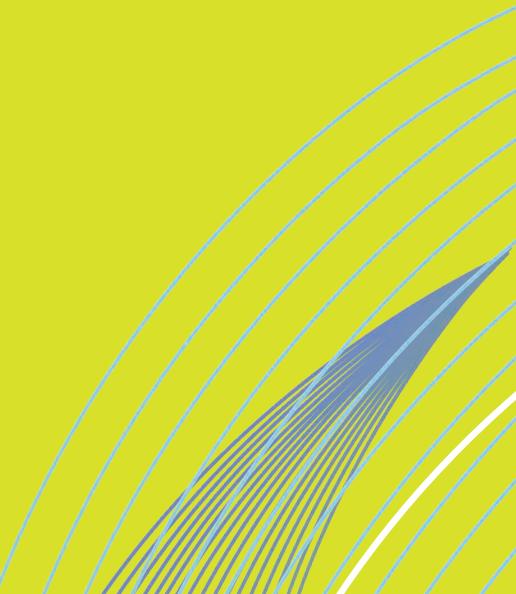

Contact your local Remko Distributor

Remko 1800 333 424